



器具光束	4,299 lm
上方光束	73 lm
下方光束	4,226 lm
最大光度	1,448 cd

初期値

光源	LED
光源型名	-
口金形式	-
色温度	5000-2900K
保守率	良0.78 中0.76 否0.72
最大取付間隔	A-A' 1.25 H : B-B' 1.25 H
備考	

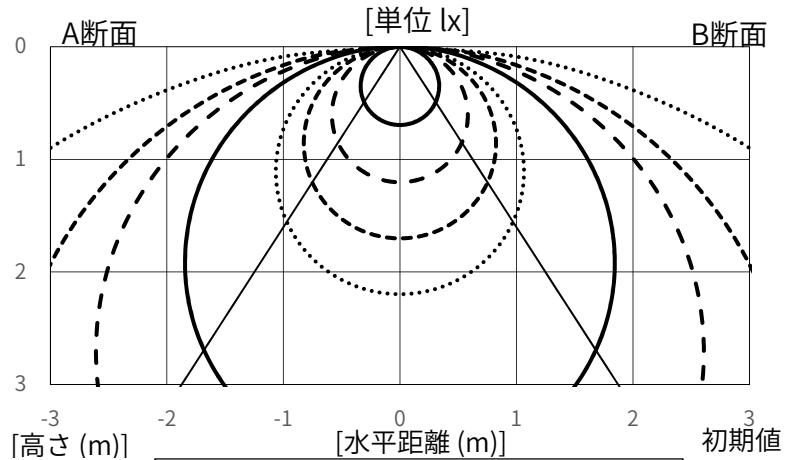

角度	光度 [cd/1,000lm]	
	A-A'	B-B'
0	337	337
10	331	331
20	312	312
30	283	283
40	245	245
50	200	200
60	150	150
70	97	97
80	47	47
90	12	12
100	3	3
110	3	3
120	2	2
130	2	2
140	2	2
150	1	1
160	1	1
170	1	1
180	1	1

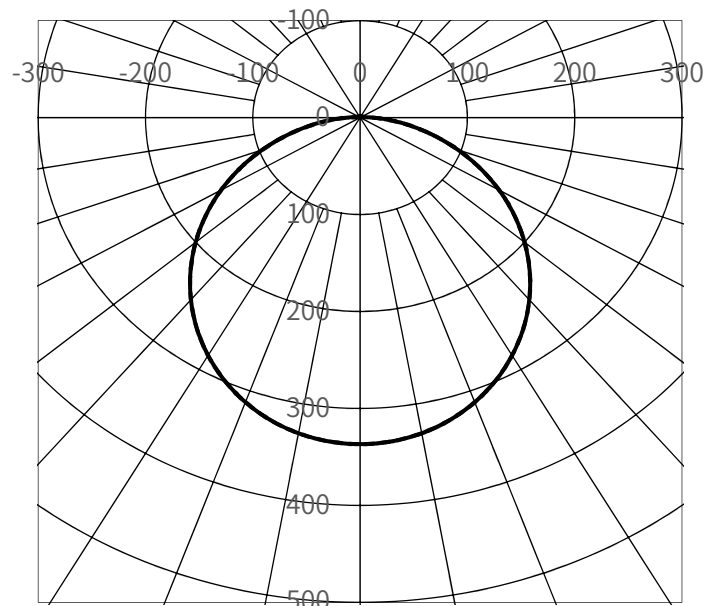

配光曲線(cd/1,000Lm)

反射率	天井		80				70				50				30		20		0	
	壁	床	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50
室指数	照明率(×0.01)																			
0.6	62	57	47	45	38	37	60	56	46	44	37	36	45	43	37	36	36	35	31	29
0.8	74	67	59	55	49	47	71	65	58	54	49	47	56	53	48	46	47	45	41	39
1.0	82	73	67	63	58	55	79	72	66	62	57	54	63	60	55	53	54	53	48	46
1.25	89	79	76	69	66	62	86	78	74	68	65	61	71	67	63	60	61	59	55	53
1.5	95	83	82	74	73	67	91	82	80	73	71	67	76	71	69	66	67	64	60	58
2.0	102	89	91	81	82	75	99	87	89	80	81	74	84	78	77	73	74	72	68	65
2.5	107	93	97	86	89	80	103	91	95	85	87	80	89	83	83	78	80	77	73	71
3.0	111	95	102	89	95	84	107	93	99	88	92	83	93	86	88	82	84	80	77	74
4.0	115	98	108	94	102	90	111	97	105	92	99	89	98	90	94	87	89	85	82	80
5.0	118	100	112	96	107	93	114	99	108	95	104	92	102	93	98	90	93	88	85	83
7.0	122	102	117	100	113	97	117	101	113	98	109	96	106	96	103	94	97	92	89	87
10	125	104	121	102	118	100	120	103	117	101	114	99	109	98	107	97	100	95	93	90