




姿図

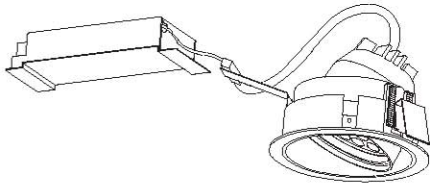

品番	DL-DD06L
光源	LED 3000K 26W
定格光束	1680 lm
1/2照度角	11°
ビーム角	12°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.18 H
	B 0.18 H
保守率	良 0.63
	中 0.60
	否 0.53

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数	照 明 率 (× 0.01)													
0.6	81	76	73	81	76	73	80	76	73	79	75	73	71	
0.8	87	82	79	86	82	78	85	81	78	84	80	77	76	
1	92	88	84	91	87	84	90	86	83	88	85	83	81	
1.25	97	92	89	96	92	89	94	90	87	92	89	87	84	
1.5	100	96	93	99	95	92	96	93	91	94	92	89	87	
2	105	102	99	103	100	98	101	98	96	98	96	94	91	
2.5	108	106	103	107	104	102	104	102	100	101	99	98	94	
3	111	108	107	109	107	105	106	104	103	103	101	100	97	
4	113	111	110	111	110	108	108	106	105	104	103	103	98	
5	115	113	112	113	111	110	109	108	107	105	105	104	99	

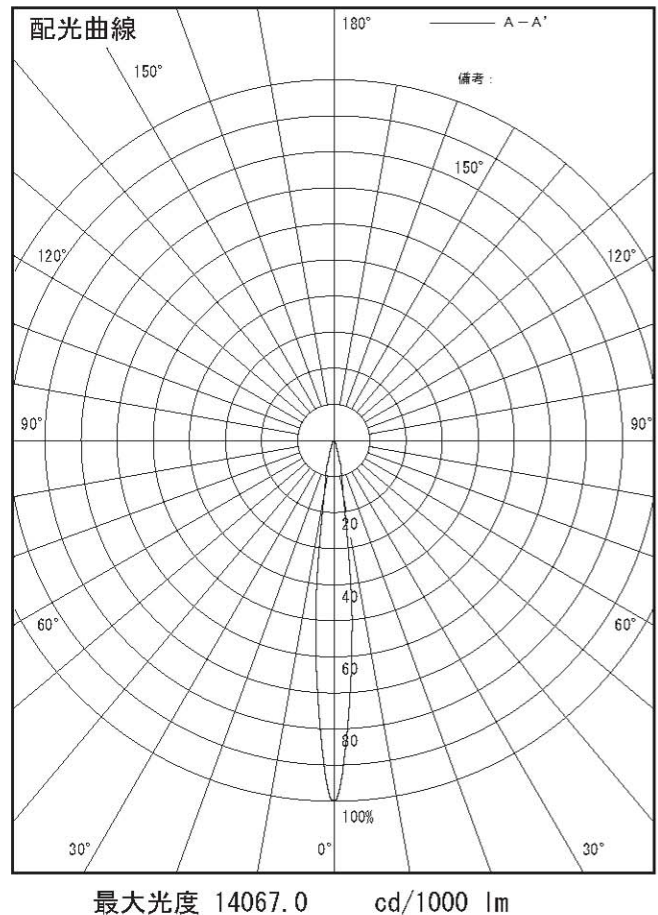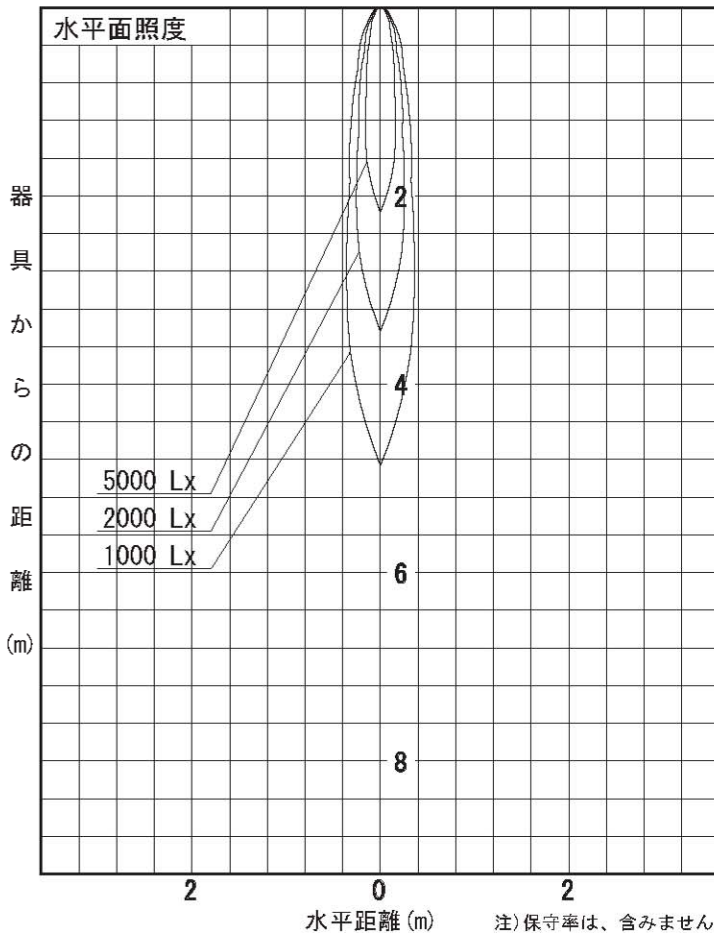

注)保守率は、含みません。