


姿図

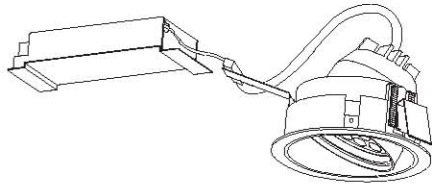

品番	DL-DD07L
光源	LED 3000K 26W
定格光束	1600 lm
1/2照度角	30°
ビーム角	32°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.54 H
	B 0.63 H
保守率	良 0.63
	中 0.60
	否 0.53

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数	照 明 率 (× 0.01)													
0.6	80	75	72	79	75	71	78	74	71	77	74	71	70	
0.8	86	81	77	85	80	77	84	80	77	82	79	76	74	
1	91	87	83	91	86	83	89	85	82	87	84	81	79	
1.25	96	92	88	95	91	88	93	89	87	91	88	86	83	
1.5	99	95	92	98	94	91	96	93	90	94	91	89	86	
2	105	101	98	103	100	97	100	98	96	98	96	94	91	
2.5	108	105	103	107	104	102	103	101	99	101	99	97	94	
3	111	108	106	109	107	105	106	104	102	103	101	100	96	
4	113	111	110	111	110	108	108	106	105	104	103	102	98	
5	115	113	112	113	111	110	109	108	107	105	104	104	99	

