


姿図

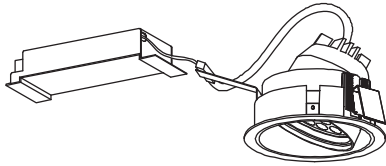

品番	DL-DD08H
光源	LED 3500K 16W
定格光束	1070 lm
1/2照度角	11°
ビーム角	12°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.19 H B 0.19 H
保守率	良 0.63
	中 0.60
	否 0.53

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
床		20			20			20			20			0
室指数	照 明 率 (× 0.01)													
0.6	82	77	74	81	77	74	80	76	74	79	76	73	72	
0.8	87	83	79	87	82	79	85	81	78	84	81	78	76	
1	93	88	85	92	88	84	90	86	84	89	85	83	81	
1.25	97	93	89	96	92	89	94	91	88	92	89	87	85	
1.5	100	96	93	99	95	92	97	94	91	94	92	90	87	
2	100	100	99	100	100	98	100	98	96	98	96	95	92	
2.5	100	100	100	100	100	100	100	100	100	100	99	98	95	
3	100	100	100	100	100	100	100	100	100	100	100	100	97	
4	100	100	100	100	100	100	100	100	100	100	100	100	99	
5	100	100	100	100	100	100	100	100	100	100	100	100	100	

