


姿図

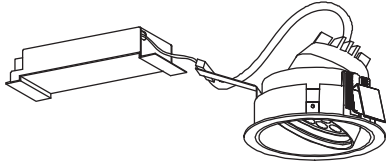

品番	DL-DD09H
光源	LED 3500K 16W
定格光束	1050 lm
1/2照度角	30°
ビーム角	34°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.59 H B 0.59 H
保守率	良 0.63
	中 0.60
	否 0.53

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数	照 明 率 ( × 0.01 )													
0.6	80	76	73	80	75	72	79	75	72	78	75	72	71	
0.8	86	81	78	85	81	78	84	80	77	83	79	77	75	
1	92	87	84	91	86	83	89	85	83	88	84	82	80	
1.25	96	92	88	95	91	88	93	90	87	91	88	86	84	
1.5	99	95	92	98	94	91	96	93	90	94	91	89	86	
2	100	100	98	100	100	97	100	98	96	98	96	94	91	
2.5	100	100	100	100	100	100	100	100	99	100	99	97	94	
3	100	100	100	100	100	100	100	100	100	100	100	100	96	
4	100	100	100	100	100	100	100	100	100	100	100	100	98	
5	100	100	100	100	100	100	100	100	100	100	100	100	99	

