



※本データは標準取付時(照明器具20° 傾斜)の場合です。

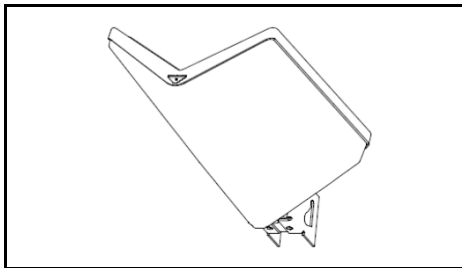


光源	LED
色温度	5700K
保守率	良0.89 中0.85 否0.80

全光束	2800 lm
上方光束	175 lm
下方光束	2625 lm
最大光度	1788 cd

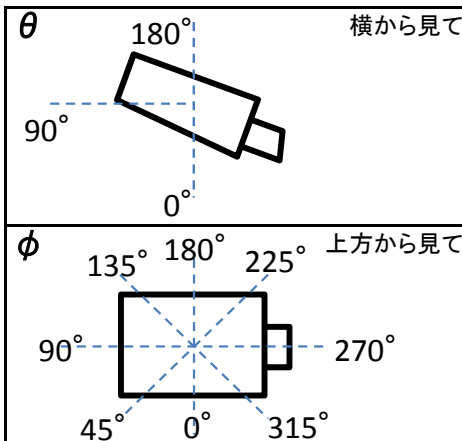

— 0-180 — 45-225 — 90-270

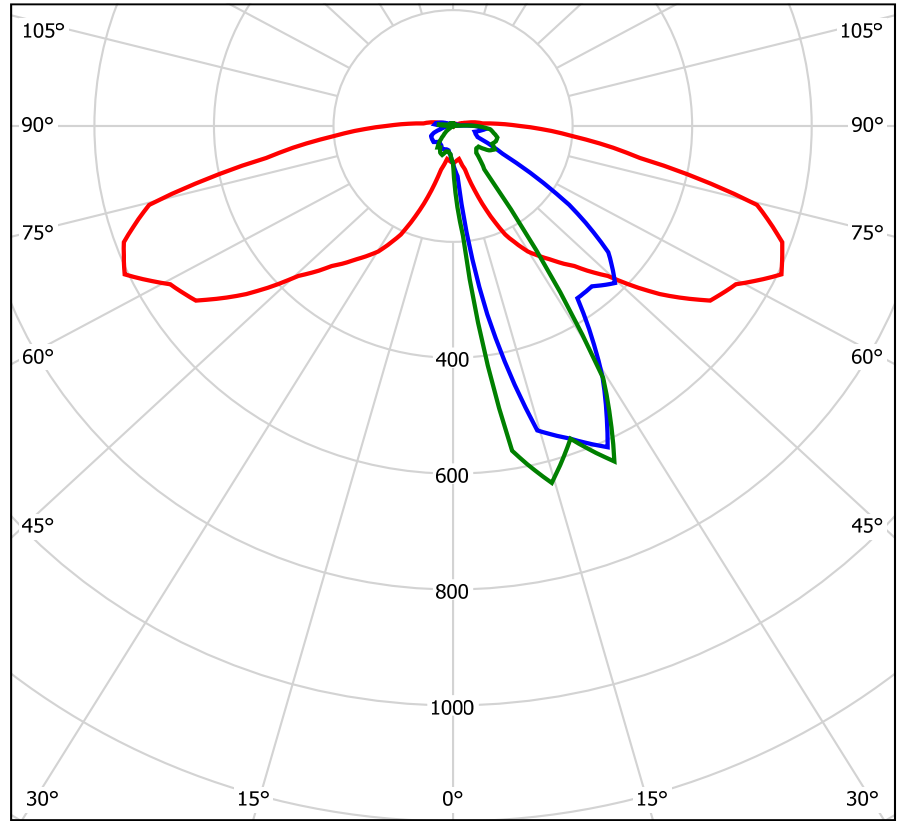

配光曲線(cd/1,000 lm)

		光度(cd/1,000Lm)							
$\theta \backslash \phi$		0°	45°	90°	135°	180°	225°	270°	315°
0°		65	65	65	65	65	65	65	65
5°		61	87	190	87	61	50	49	50
10°		58	330	569	330	58	43	45	43
15°		78	544	638	544	78	42	46	42
20°		143	574	574	574	143	43	53	43
25°		207	612	639	612	207	43	51	43
30°		250	500	502	500	250	39	43	39
35°		281	363	91	363	281	37	45	37
40°		316	361	61	361	316	35	35	35
45°		366	383	55	383	366	39	22	39
50°		451	339	56	339	451	43	16	43
55°		525	237	73	237	525	42	5	42
60°		546	95	81	95	546	41	2	41
65°		606	45	72	45	606	41	1	41
70°		586	40	77	40	586	34	1	34
75°		526	38	77	38	526	22	1	22
80°		318	47	69	47	318	16	1	16
85°		200	56	62	56	200	11	1	11
90°		112	36	39	36	112	8	1	8